

FIG. 1A
(Prior Art)

C1500-0650

Byte 0		Byte 1		Byte 2		yte 3]
4-bit version	4-bit hd len	TOS value	13_	13_ len (in bytes)			
16-b	it identifi	cation	3-bit flags	3-bit 13-bit fragment offset flags]
TIL		prot_typ 28		csum			
Source IP address 30							
Dest IP address 32							
Options (if any)							
Source port number 34			De	Dest port number 36			TCP/UDP only
32 bit sequence number							
32 bit acknowledge number							
4-bit hll							
16 bit TCP checksum 16 bit urgent pointer							

FIG. 1B (PRIDE ARX)

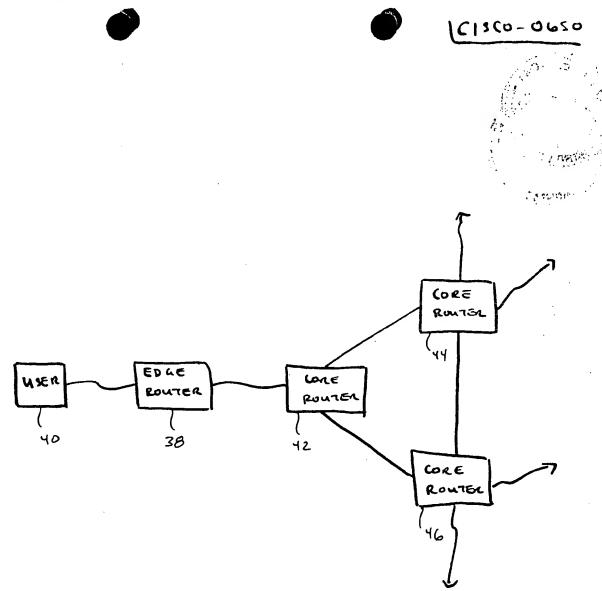


FIG.2 (Prior Art)